


NOTE:
ULTRA-GUARD EFS IS TO BE INSTALLED AFTER THE ULTRA-GUARD ELASTOMERIC HB HAS CURED FOR A MINIMUM OF 24 HOURS WHEN TEMPERATURES ARE CONSTANTLY ABOVE 40 DEGREES F.

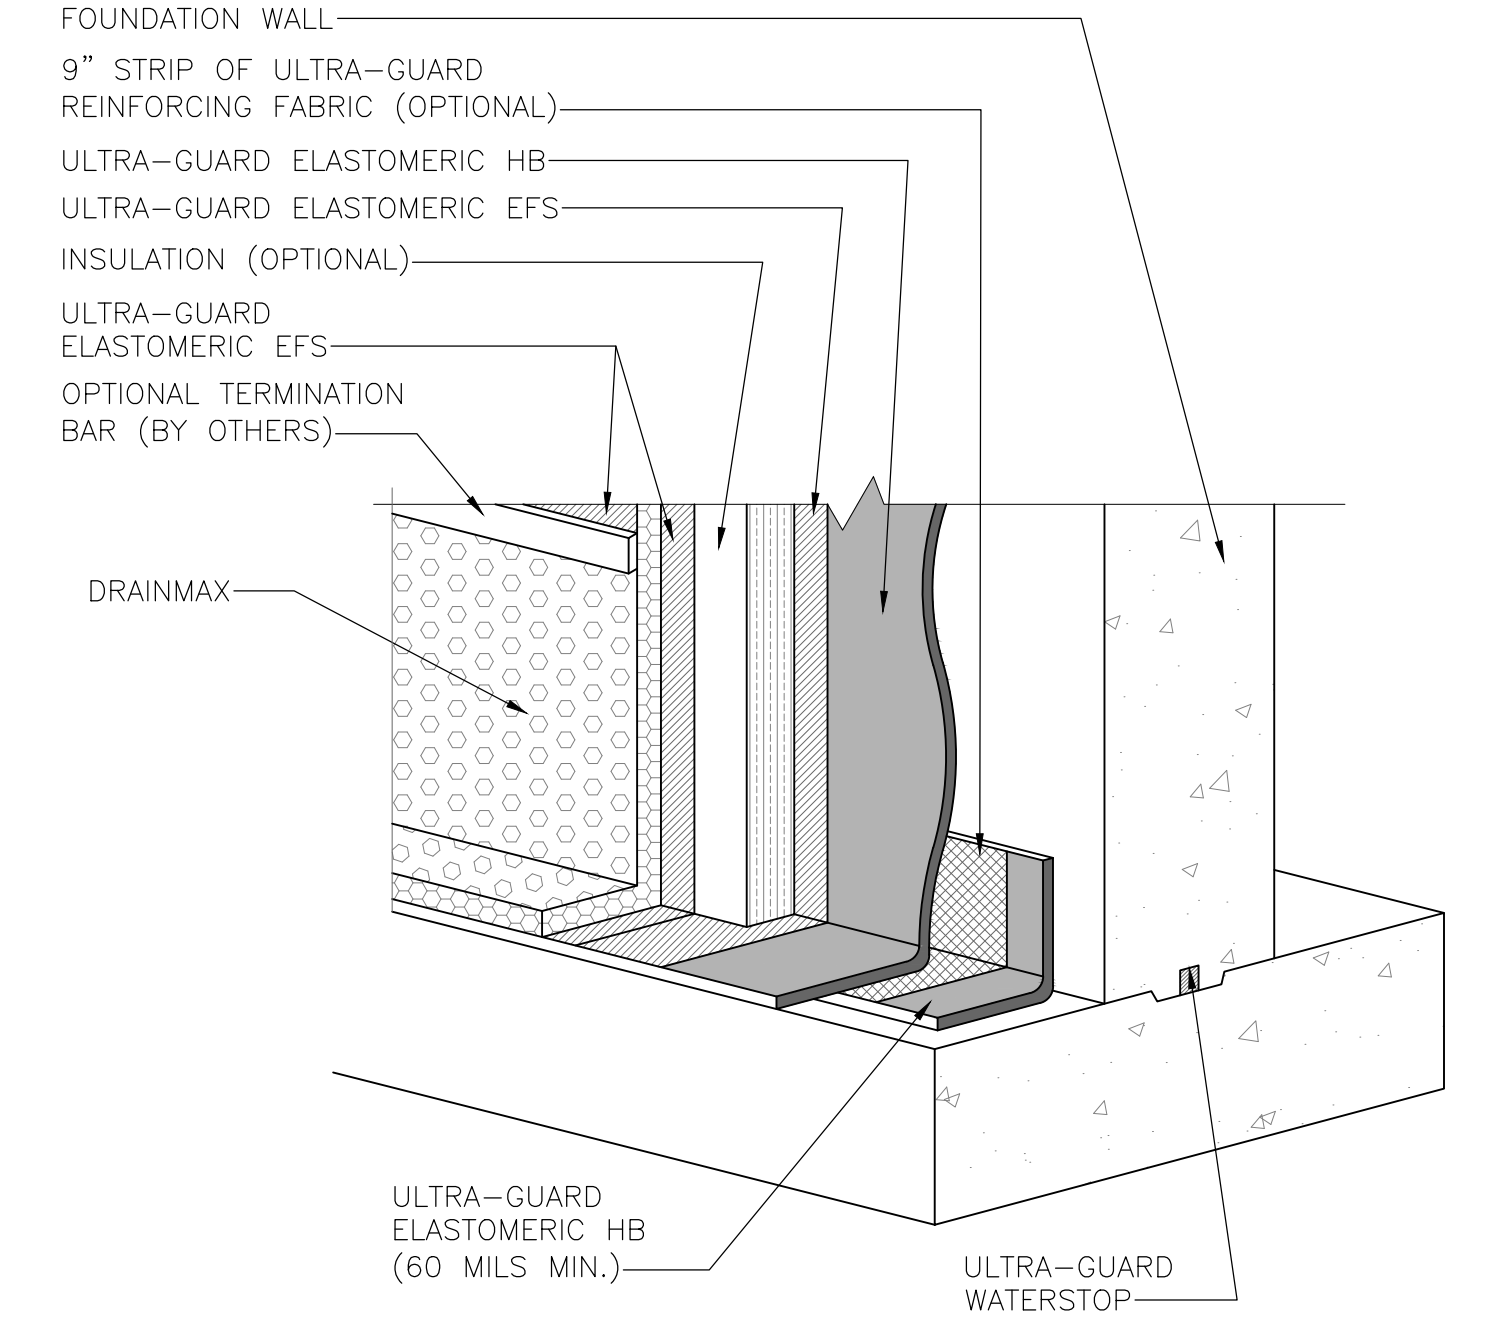

DRAWINGS ON 8 1/2"x11 TITLE BLOCKS ARE NOT TO SCALE.

ULTRA GUARD HA-551 WATERPROOFING SYSTEM

BELOW GRADE VERTICAL ASSEMBLY

	DETAIL ID:		HA-22
	REPRESENTATIVE:		
	DATE:	SHT:	OF