


IF TERMINATED AT TOP OF PLANTER, INSTALL TERMINATION BAR WITH BEAD OF ULTRA-GUARD EFS SEALANT

1. DRAIN-MAX 650
2. PROTECTION COARSE
3. ULTRA-GUARD ELASTOMERIC HB
4. ULTRA-GUARD REINFORCING FABRIC
5. STRUCTURAL CONCRETE DECK

TOP OF PLANTER CONDITIONS VARY BY PROJECT. REFER TO PROJECT CONSTRUCTION DOCUMENTS OR CONTACT GMX FOR RECOMMENDATIONS REGARDING TOP OF PLANTER WALL.

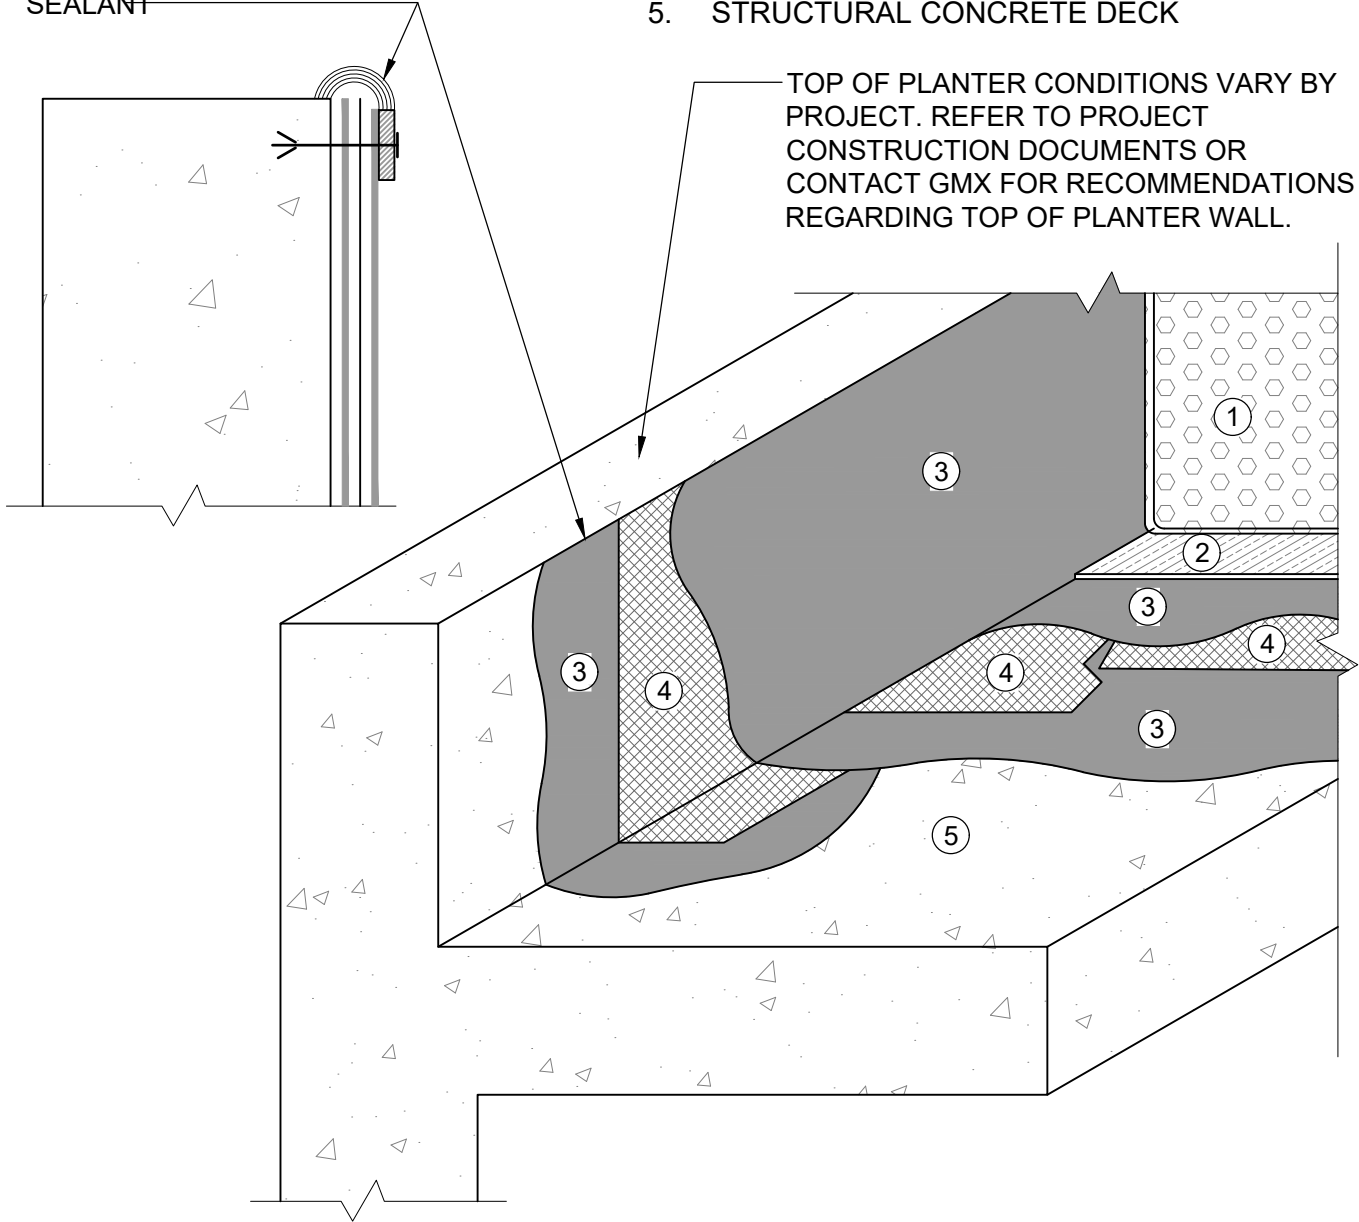

**NOTES:**

1. SYSTEM DETAIL DEPICTS 2 PLY POLYESTER REINFORCED ULTRA-GUARD ELASTOMERIC HB MEMBRANE.
2. REFER TO SPECIFICATION AND TECHNICAL DATA SHEETS AT GMXCO.COM FOR ADDITIONAL INFORMATION.

DRAWINGS ON 8<sup>1</sup>/<sub>2</sub>"x11 TITLE BLOCKS ARE NOT TO SCALE.

**ULTRA GUARD HA-551 WATERPROOFING SYSTEM**

**PLANTER DETAIL**



DETAIL ID:

HA-20

REPRESENTATIVE:

DATE:

SHT:

OF