Ther wal Drain

7 FLUID APPLIED | Membrane Waterproofing



DESCRIPTION

ThermalDrain® is a user friendly synthetic protection board that is a great alternative to fiberglass. Thermal Drain is more durable than fiberglass and provides excellent drainage. ThermalDrain is also the only protection board providing R-Value that contains 70% post-consumer recycle content. Our environmentally friendly drainage board will not irritate your skin and is easy to work with. ThermalDrain is designed to be used with spray applied waterproofing and when used with GMX's waterproofing membrane, it provides a great system of protection for many years to come. Contact GMX, Inc. today for more information on how to go GREEN with ThermalDrain.


PRODUCT ADVANTAGES

- No more itching
- More durable than fiberglass
- Flexible, bends easily
- Environmentally friendly, 70% post-consumer recyclable

TECHNICAL SERVICES | PRODUCT SPECIFICATIONS Thermal Drain: Synthetic protection board

Board Thickness	3/4"	1 3/16"	2 3/8"
Drainage Ability (Test Method ASTM D 4716*) Gallons/Hour/Lineal ft.	85	135	270
Resistance Thermal Resistance *Hydraulic gradient of 1.0	R-3	R-5	R-10

May help to contribute to LEED® credits:		
EA Credit 1:	Optimize Energy Performance	
EQ Credit 3.1:	Construction IAQ Management Plan: During Construction	
EQ Credit 4.2:	Low Emitting Materials: Paints and Coatings	
MR Credit 5.1:	Regional Materials: 10% Extracted, Processed and Manufactured Regionally	
MR Credit 5.2:	Regional Materials: 20% Extracted, Processed and Manufactured Regionally	

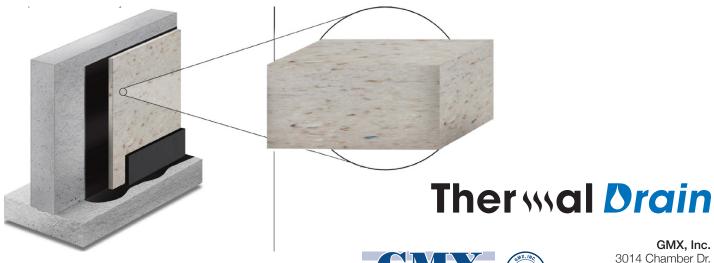

US Patents 8,192,833; 7,908,801 CA Patent 2,712,098

This product provides thermal protection and drainage for your foundation wall.

ISO 10001:2015

GMX, Inc. 3014 Chamber Dr. Monroe, NC 28110 Toll Free: 866-228-7743 www.gmxwaterproofing.com

LEED® Buildings and Leadership in Energy and Environmental Design® are trademarks of the U.S. Green Building Council. The Leadership in Energy and Environmental Design (LEED) Green Building Rating System is a voluntary, consensus-building national standard that was initiated by the U.S. Green Building Council (USGBC) for developing high-performance sustainable buildings.